



Παγκόσμιος Ηγέτης στο **Ιδανικό** Κλίμα.

Αντλίες Θερμότητας



Κεντρικά γραφεία Βενιζέλου 5
Έκθεση Βενιζέλου 3 & Αριστείδου 40
55133 Καλαμαριά, Θεσσαλονίκη
Τ.2310440844

info@klimamichaniki.gr | www.klimamichaniki.gr



Natural symbiosis with heat pumps

By running on low temperature, Daikin Altherma heat pump convectors naturally fit with Daikin heat pumps. The heat pump convector range is made of 3 models:

- 1 Floor standing model with indoor air quality control (optional)
- 2 Wall mounted model with remote control
- 3 Concealed model hidden in the ceiling or wall



Daikin Altherma HPC Floor standing model



The floor standing heat pump convector impresses with its low sound operations, and its slim design that received the RedDot Award 2020. Next to heating and cooling, the unit can also provide indoor air quality control.

Why Indoor Air Quality Matters

Indoor Air Quality (IAQ) refers to the air quality in a building or structure, breathed in every day by the building's occupants.

When planning new residential buildings, schools, offices or light commercial buildings, many things must be considered. Besides structural factors, there are also the topics of heating, cooling and something often neglected: indoor air quality.



Did you know that the indoor air we breathe, whether at home, at the office, or in a hotel room could in fact be much more polluted than the air outside?

- 90% of our lives is spent indoors
- Indoor air quality can be 2 to 5 times worse than outdoor air quality because of pollutants, such as pollen, bacteria, etc.



How does Daikin Altherma HPC ensure a healthy and comfortable indoor air quality?

When a pollutant level of indoor air is reached, the IAQ sensor opens a damper, which allows fresh air to come in. The incoming fresh air is immediately heated or cooled (depending on the demand) by the heat pump convector. In this way the indoor air remains of good quality while comfort is ensured.

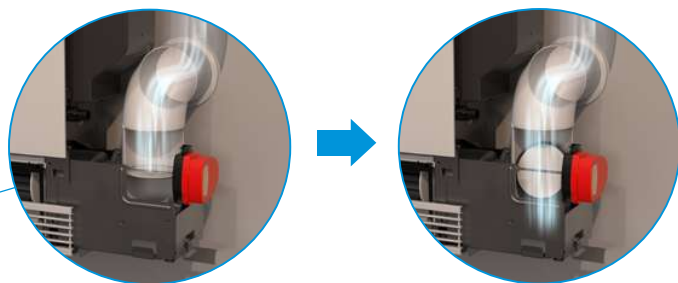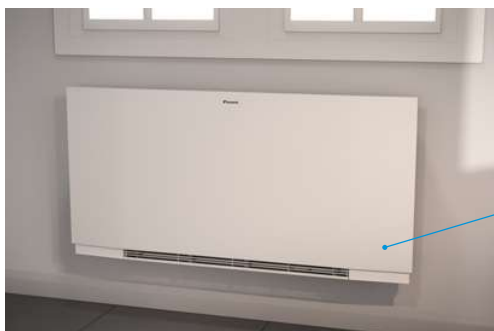




Slim design



The floor standing Daikin Altherma HPC has a depth of only 135 mm that fits any house or apartment. Its optimised design was rewarded with the Reddot Design Award 2020.

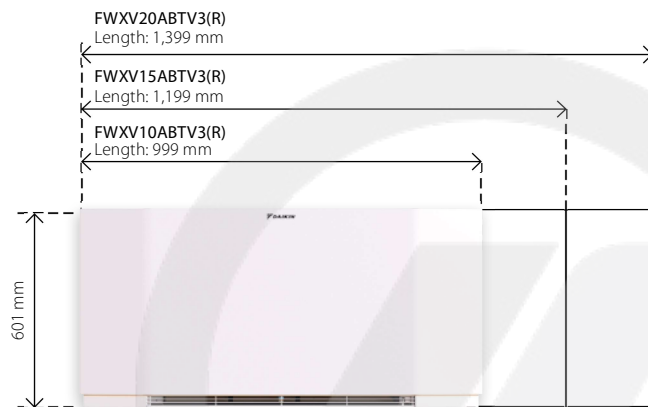


Fast and high capacity

The Daikin Altherma HPC combines the advantages of residential underfloor heating and radiators. It delivers high-capacity heating or cooling faster and can be set at ultra-low temperatures (35/30 °C regime).



Discreet

As the unit reaches its set point, a continuous modulating fan gradually reduces its speed and creates less noise. For the wall mounted and concealed units, the sound pressure measures 25dB(A) at 1m when the fan is on low-speed setting. Even lower sound pressure in super-silent mode (night mode).

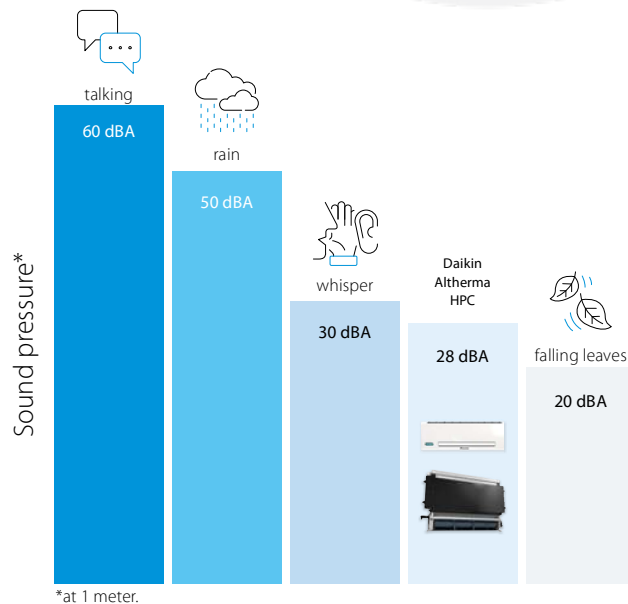

Controls

Daikin offers a wide variety of controllers that are functional and have a great design.

EKRTCTRL1



- Built-in controller
- Fully modulating
- Multicolor display

EKRTCTRL2



- Built-in controller
- 4 speed settings

EKWHCTRL1



- Wall controller
- Fully modulating
- In combination with EKWHCTRL0

EKPCBO



- Built-in controller
- ON/OFF
- In combination with external thermostats

EKWHCTRL1A



- Wall controller
- Fully modulating
- In combination with EKWHCTRL0
- Includes indoor air quality sensor




Wall-mounted model

Thanks to its slim design, our wall-mounted unit blends in with your interior discreetly while helping you save valuable floor space.

Slim design

Daikin Altherma HPC is a compact unit made of a design metal casing including all valves.

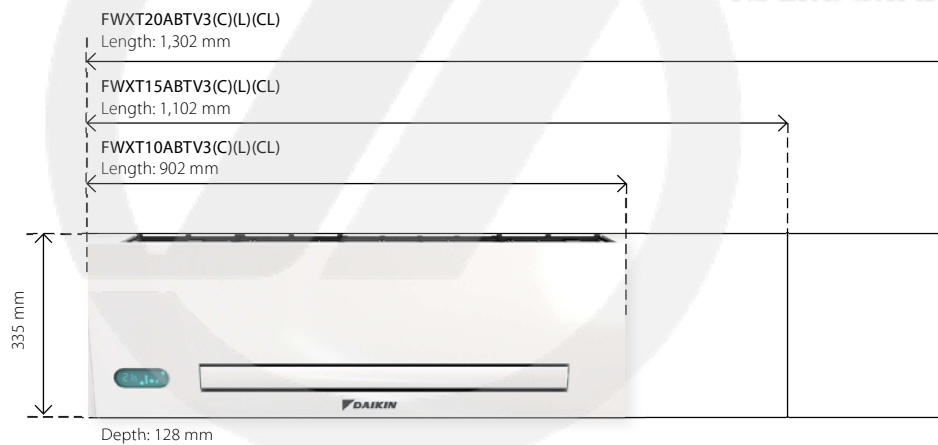

Controls

Choice of:

- Fully modulating controller allowing for remote control of the unit.
- Infrared remote controller and on-board touch panel.

EKWHCTRL1




- Wall controller
- Fully modulating
- For models FWXT-ABTV3(L)

Infrared remote controller



- Remote
- Fully modulating
- For models FWXT-ABTV3C(L)

Compactness

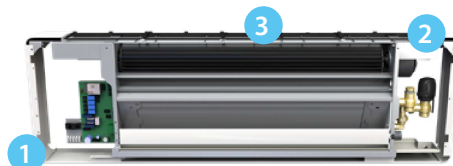

- 1 Slim depth**
The depth of 128 mm is an outstanding technical achievement that ensures a perfect fit in any home.
- 2 More space for valves**
Ease of installation: the space for hydraulic valves is wide and easily accessible.


- 3 Modulated airflow**
When there is less heating demand, the unit modulates its airflow to slow down the fan rate, and in the process, lowers the operational sound.



Concealed model

Forget about your heating or cooling installation altogether: our concealed model vanishes into the wall or ceiling for visual comfort while preserving its unique heating and cooling capabilities.

Slim design

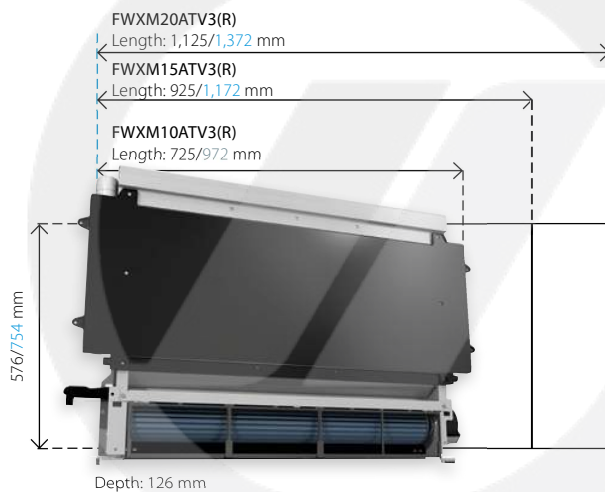

Blue dimensions are for the front cover.

Controls

EKWHCTRL1




- Wall controller
- Fully modulating
- In combination with EKWHCTRL0

Flexible installation

Daikin Altherma HPC can be installed in four different ways, allowing you to install it in almost all conditions. The unit can be positioned horizontally or vertically. For horizontal, in-ceiling installation, three different possibilities are offered:

- Horizontal cover panel and vertical grille for air outlet
- Horizontal intake grille and vertical grille for air outlet
- Horizontal intake and outlet grilles

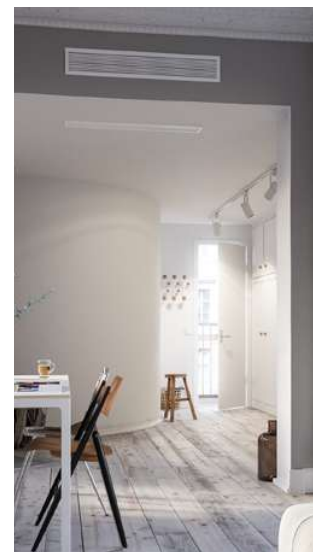

Heat pump convectors



FWXV-ATV3



FWXV-ATV3R

Indoor unit				FWXV10ABTV3(R)		FWXV15ABTV3(R)		FWXV20ABTV3(R)	
Cooling capacity at 7/12 °C	Min.		kW	0.78		1.10		1.13	
	Med.		kW	1.11		1.65		1.98	
	Max.		kW	1.62		2.64		2.99	
Sensible cooling capacity at 7/12 °C	Min.		kW	0.58		0.82		0.85	
	Med.		kW	0.71		1.15		1.55	
	Max.		kW	1.25		1.91		2.33	
Heating capacity at 45/40 °C	Min.		kW	0.87		1.12		1.11	
	Med.		kW	1.27		1.83		2.32	
	Max.		kW	1.96		2.86		3.50	
Power input	Min.		W	6		7		8	
	Med.		W	10		13		15	
	Max.		W	19		25		31	
Fan speed	Min.		RPM			720			
	Med.		RPM			1,220			
	Max.		RPM			1,700			
Casing	Colour			White, RAL 9003					
	Material			Metal sheet					
Dimensions	Unit	Height	mm			601			
		Width	mm	999		1,199		1,399	
		Depth	mm			135			
	Packed unit	Height	mm			690			
		Width	mm	1,230		1,430		1,630	
		Depth	mm			210			
Weight	Unit		kg	20		23		26	
	Packed unit		kg	21		24		27	
Packing	Material			Carton					
	Weight		kg			1			
Heat exchanger	Quantity					1			
	Internal coil volume		l	0.80		1.13		1.46	
		Max Operating pressure		bar			10		
Water circuit	Piping connections diameter		inch	3/4" male					
	Piping material			Copper					
	Heating - Water pressure drop at 45/40 °C	Min.	kPa	7		9		8	
		Med.	kPa	8		14		15	
		Max.	kPa	11		23		22	
	Cooling - Water pressure drop at 7/12 °C	Min.	kPa	7		9		8	
		Med.	kPa	8		14		15	
		Max.	kPa	11		23		22	
	Heating - Water flow rate at 45/40 °C	Min.	kg/h	150		193		191	
		Med.	kg/h	218		315		399	
		Max.	kg/h	337		492		602	
	Cooling - Water flow rate at 7/12 °C	Min.	kg/h	134		189		194	
		Med.	kg/h	191		284		341	
		Max.	kg/h	279		454		514	
	Pressure	Heating/Max.				10			
Sound power level	Min.		dBA	40		42		43	
	Med.		dBA	47		49		50	
	Max.		dBA	56		57		58	
Operation range	Heating	Water side	Min.	°C	30				
			Max.	°C	85				
	Cooling	Water side	Min.	°C	5				
			Max.	°C	18				
	Indoor installation	Ambient	Min.	°CDB	0				
			Max.	°CDB	45				
Control systems	Infrared remote control				no				
	On-board control				yes				
Electrical specifications				FWXV10ABTV3(R)		FWXV15ABTV3(R)		FWXV20ABTV3(R)	
Power supply	Phase					1			
	Frequency		Hz			50			
	Voltage		V			230			
Electrical power consumption	Max.		W	19		25		31	
	Standby		W	3		4		5	
Current	Maximum running current		A	0.15		0.21		0.27	

Heat pump convectors



FWXT-ATV3



FWXT-ATV3C



FWXT-ATV3L



FWXT-ATV3CL

Indoor unit				FWXT10ABTV3(C)(L)(CL)	FWXT15ABTV3(C)(L)(CL)	FWXT20ABTV3(C)(L)(CL)	
Cooling capacity at 7/12 °C	Min.		kW	0.49	0.62	0.70	
	Med.		kW	0.88	1.08	1.21	
	Max.		kW	1.24	1.61	1.94	
Sensible cooling capacity at 7/12 °C	Min.		kW	0.37	0.52	0.57	
	Med.		kW	0.70	0.86	1.02	
	Max.		kW	0.98	1.27	1.52	
Heating capacity at 45/40 °C	Min.		kW	0.55	0.79	0.74	
	Med.		kW	1	1.36	1.55	
	Max.		kW	1.50	2.01	2.13	
Power input	Min.		W		5		
	Mid.		W	8	9	10	
	Max.		W	19	20	29	
Fan speed	Min.		RPM		680		
	Med.		RPM		1,100		
	Max.		RPM		1,500		
Casing	Colour			White, RAL 9003			
	Material			Metal sheet			
Dimensions	Unit	Height	mm		335		
		Width	mm	902	1,102	1,302	
		Depth	mm		128		
	Packed unit	Height	mm		490		
		Width	mm	1,030	1,230	1,430	
		Depth	mm		210		
Weight	Unit	kg	14	16	19		
	Packed unit	kg	15	17	20		
Packing	Material			Carton			
	Weight	kg			1		
Heat exchanger	Quantity				1		
	Internal coil volume		l	0.50	0.61	0.77	
		Max Operating pressure		bar		10	
Water circuit	Piping connections diameter		inch		3/4" male		
	Piping material				Copper		
	Heating - Water pressure drop at 45/40 °C	Min.	kPa	5.10	4.81	6	
		Med.	kPa	12	6.30	6.40	
		Max.	kPa	16.30	7.20	8.10	
	Cooling - Water pressure drop at 7/12 °C	Min.	kPa	4.80	4.70	5.50	
		Med.	kPa	10.50	5.60	5.40	
		Max.	kPa	11.70	5.10	5.30	
	Heating - Water flow rate at 45/40 °C	Min.	kg/h	100	140	150	
		Med.	kg/h	170	240	300	
		Max.	kg/h	260	350	420	
	Cooling - Water flow rate at 7/12 °C	Min.	kg/h	80	110	120	
		Med.	kg/h	150	190	210	
		Max.	kg/h	210	280	330	
	Pressure	Heating/Max.		bar		10	
			Min.	dBA	35	36	37
			Med.	dBA	46	47	48
			Max.	dBA	53	54	55
Operation range	Heating	Water side	Min.	°C	30		
			Max.	°C	85		
	Cooling	Water side	Min.	°C	5		
			Max.	°C	18		
	Indoor installation	Ambient	Min.	°CDB	0		
			Max.	°CDB	45		
Control systems	Infrared remote control			yes for -C models			
	On-board control			yes			
Electrical specifications				FWXT10ABTV3(C)(L)(CL)	FWXT15ABTV3(C)(L)(CL)	FWXT20ABTV3(C)(L)(CL)	
Power supply	Phase				1		
	Frequency		Hz		50		
	Voltage		V		230		
Electrical power consumption	Max.		W	19	20	29	
	Standby		W	3	4	5	
Current	Maximum running current		A	0.16	0.18	0.24	

Heat pump convectors



FWXM-ATV3



FWXM-ATV3R

Indoor unit				FWXM10ATV3(R)		FWXM15ATV3(R)		FWXM20ATV3(R)				
Cooling capacity at 7/12 °C	Min.		kW	0.75		1.15		1.32				
	Med.		kW	1.36		2.08		2.39				
	Max.		kW	2.12		2.81		3.30				
Sensible cooling capacity at 7/12 °C	Min.		kW	0.59		0.83		1.02				
	Med.		kW	1.07		1.51		1.84				
	Max.		kW	1.72		2.11		2.71				
Heating capacity at 45/40 °C	Min.		kW	0.82		1.20		1.47				
	Med.		kW	1.53		2.16		2.59				
	Max.		kW	2.21		3.02		3.81				
Power input	Min.		W	4		6		5				
	Med.		W	8		11		11				
	Max.		W	19		20		29				
Fan speed	Min.		RPM	680								
	Med.		RPM	1,100								
	Max.		RPM	1,500								
Casing	Material			No casing								
Dimensions	Unit	Height	mm	576								
		Width	mm	725		925		1,125				
		Depth	mm	126								
	Packed unit	Height	mm	690								
		Width	mm	830		1,030		1,230				
		Depth	mm	210								
Weight	Unit	kg	12		15		18					
	Packed unit	kg	13		16		19					
Packing	Material			Carton								
	Weight			kg								
Heat exchanger	Quantity			1		1		1				
	Internal coil volume			0.80		1.13		1.46				
	Max Operating pressure			bar								
Water circuit	Piping connections diameter			inch								
	Piping material			3/4" male								
	Heating - Water pressure drop at 45/40 °C			Min.			Copper					
							2.70					
							3					
	Med.			kPa			4.30					
				9.30								
				8.90								
	Max.			kPa			1.90					
				19.10								
				21.20								
	Cooling - Water pressure drop at 7/12 °C			Min.			kPa			1.90		
							2.70					
							2.50					
	Med.			kPa			4.30					
9.90												
8.80												
Max.			kPa			8.20						
			17.10									
			18									
Heating - Water flow rate at 45/40 °C			Min.			kg/h			141			
						206						
						253						
Med.			kg/h			263						
			372									
			445									
Max.			kg/h			380						
			519									
			655									
Cooling - Water flow rate at 7/12 °C			Min.			kg/h			129			
						198						
						227						
Med.			kg/h			234						
			358									
			411									
Max.			kg/h			365						
			483									
			568									
Pressure		Heating/Max.	bar									
Sound power level	Min.		dB(A)	35		36		36				
	Med.		dB(A)	45		46		47				
	Max.		dB(A)	53		54		55				
Operation range	Heating	Water side	Min.	°C								
			30									
	Max.	°C										
	85											
	Cooling	Water side	Min.	°C								
5												
Max.	°C											
18												
Indoor installation	Ambient	Min.	°CDB									
		0										
45												
Control systems	Infrared remote control			no								
	On-board control			no								
Electrical specifications				FWXM10ATV3(R)		FWXM15ATV3(R)		FWXM20ATV3(R)				
Power supply	Phase			1								
	Frequency			Hz								
	Voltage			V								
Electrical power consumption	Max.			19		20		29				
	Standby			3		4		5				
Current	Maximum running current			0.16		0.18		0.26				