



Παγκόσμιος Ηγέτης στο **Ιδανικό** Κλίμα.

Αντλίες Θερμότητας



Κεντρικά γραφεία Βενιζέλου 5
Έκθεση Βενιζέλου 3 & Αριστείδου 40
55133 Καλαμαριά, Θεσσαλονίκη
Τ.2310440844

info@klimamichaniki.gr | www.klimamichaniki.gr



Domestic hot water heat pumps




Why choose Daikin Altherma domestic hot water heat pump?

How does it work?

The system is made of a singly indoor unit that extracts energy from the air to provide domestic hot water. The unit collects up to 60% of its energy in the air, while the rest is provided by electricity.

This heat pump relies on a compressor and a refrigerant to transfer the energy from the air to the water, heating the water up to your needs and delivering it into your house.


КАИМАМХАНИК

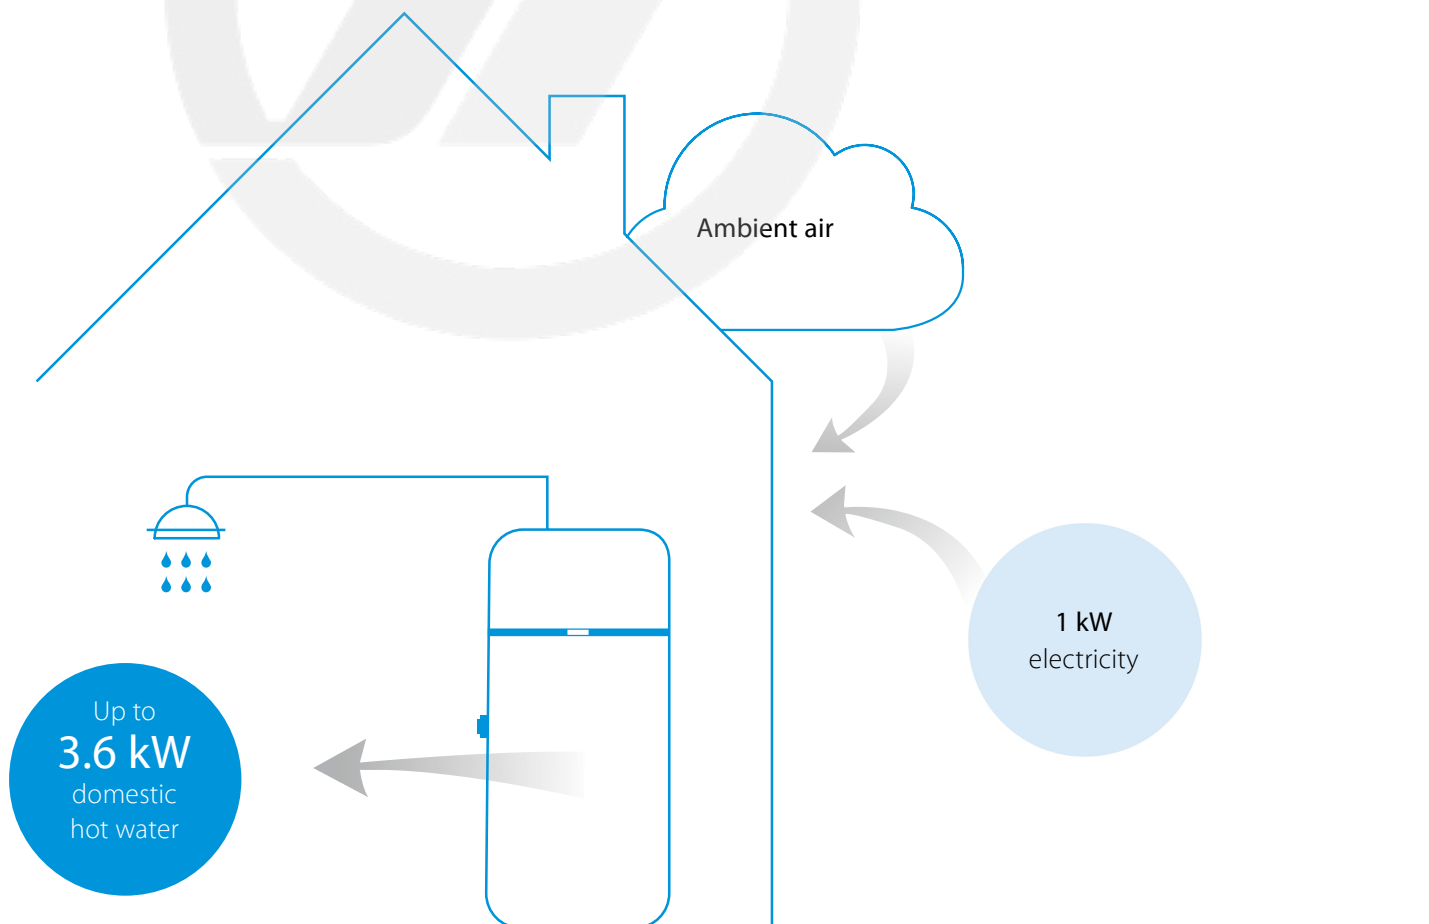




Remarkably quiet

With a sound power of 51dB(A) indoor, and 44dB(A) outdoor, it is one of the most silent domestic hot water heat pump.

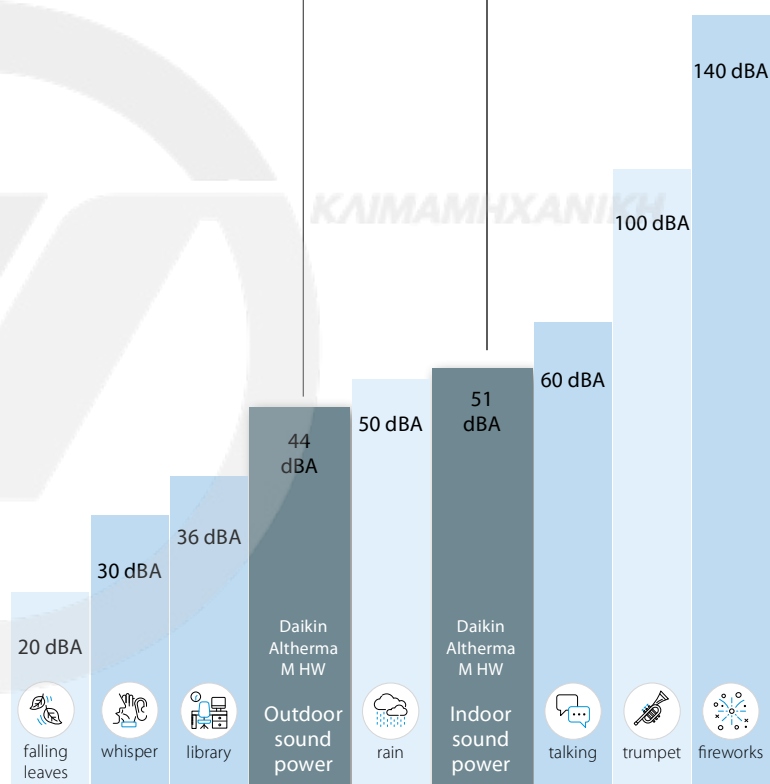

Sound pressure scale

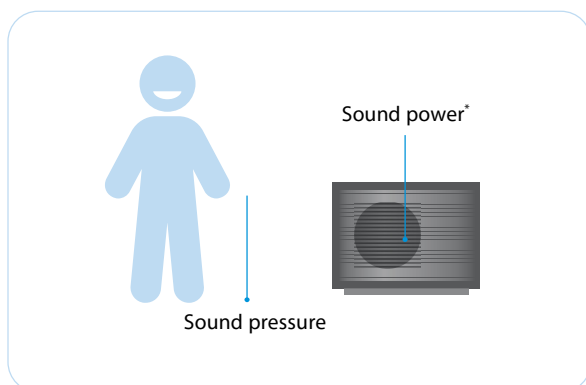

The acoustic level can be evaluated in two ways


- The **sound power** is generated by the unit itself, independently of distance and environment
- The **sound pressure** is the sound perceived at a certain distance. The sound pressure is usually calculated at between 1 and 5 metres from the unit.

Product range



These models are connectable to solar thermal or another auxiliary source, thanks to an extra coil, support the heat up of domestic hot water.

High temperature models are dedicated for warm climate conditions.

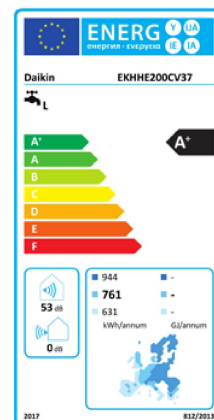

Features


Daikin Altherma M HW is an air-water heat pump for the production of domestic hot water, storage in a enamelled steel tank, with condenser having an external jacket to guarantee top safety and hygiene.

- Maximum temperature of 62 °C from renewable energy with heat pump alone or through a heating element (up to 75 °C)
- Programmable digital interface with TOUCH keys
- Integration through Solar Thermal energy (-PCV37 model)
- Integration with Photovoltaic Solar system

Intuitive controls

A very simple and intuitive display

- White backlit LEDs to control temperature and features
- Red backlit LEDs for alarm warnings
- The 4 side TOUCH keys turn Daikin Altherma M HW on/off (⏻); keys to browse through the MENU (SET) and increase (+) or decrease (-) settings

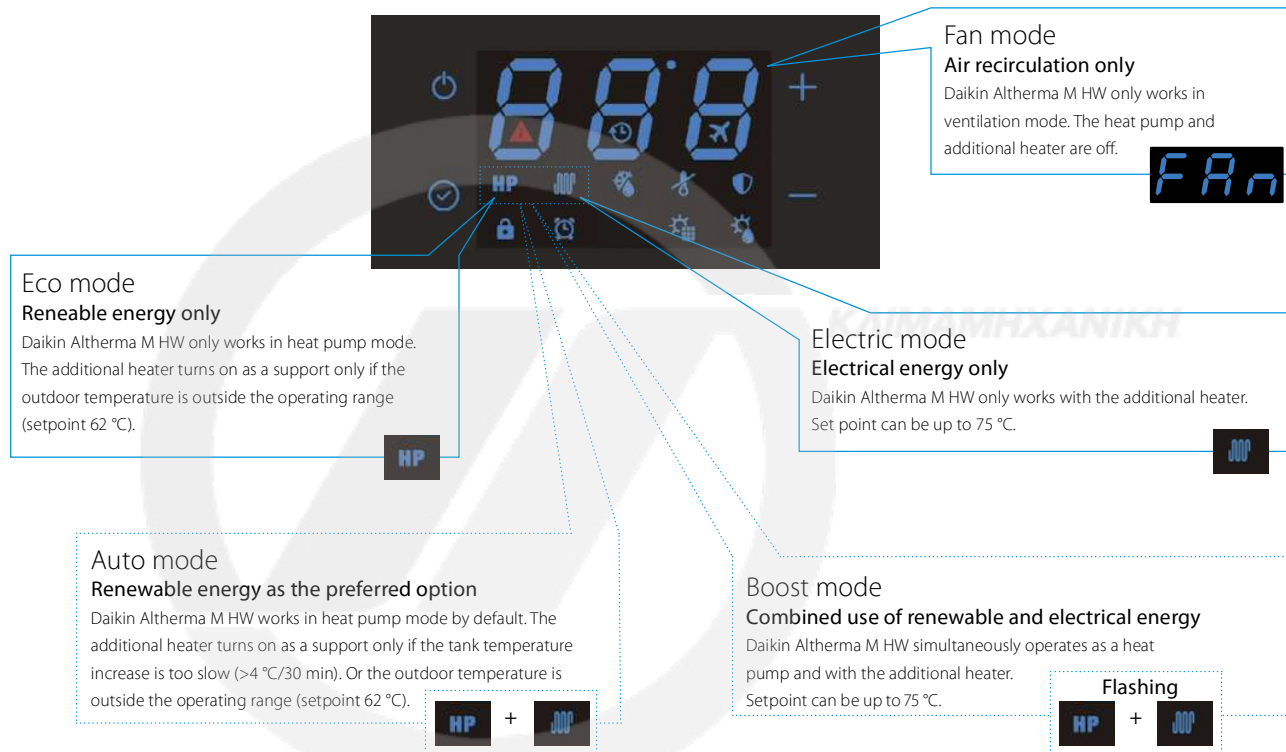

Specifications

Type	Volume (l)	Capacity	Dimensions (mm)	Optimisation from Photovoltaic	Integrated Solar Thermal Control	Legionella Control Sanitisation	Time slot-based operation	OFF PEAK feature	Defrosting on	Holiday Mode
EKHHE-CV37	200		628 x 628 x 1,607	•	-	•	•	•	•	•
	260		628 x 628 x 1,892	•	-	•	•	•	•	•
EKHHE-PCV37	200		628 x 628 x 1,607	•	•	•	•	•	•	•
	260		628 x 628 x 1,892	•	•	•	•	•	•	•
EKHLE-CV3	200		628 x 628 x 1,607	•	-	•	•	•	-	•
	260		628 x 628 x 1,892	•	-	•	•	•	-	•

Installation

Daikin Altherma M HW can be installed in any room, including non-heated ones like garages and laundry rooms, and does not require any special work, except for the holes for the air intake and exhaust pipes.



Some installation methods

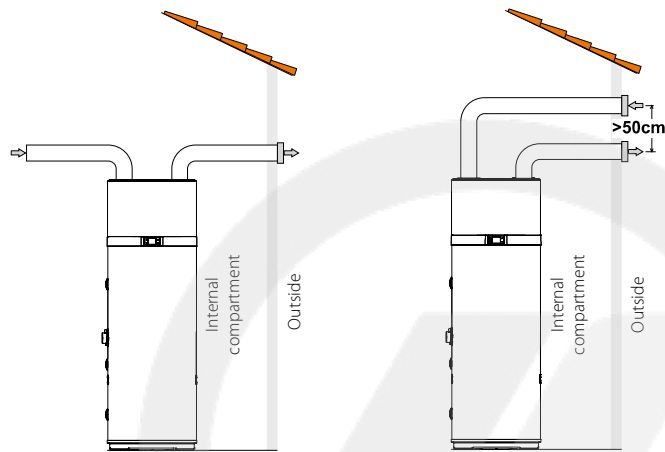


Fig. 1 - Example of air discharge connection

Fig. 2 - Example of air discharge connection

The heat pump requires suitable air ventilation. A suggested method for a designated air duct is provided in Fig. 1. Plus, it is essential to guarantee suitable ventilation in the room where the appliance is installed.

An alternative solution is provided in the picture on the right (Fig. 2): it involves additional ducting that draws air from outdoors, rather than directly from indoors.

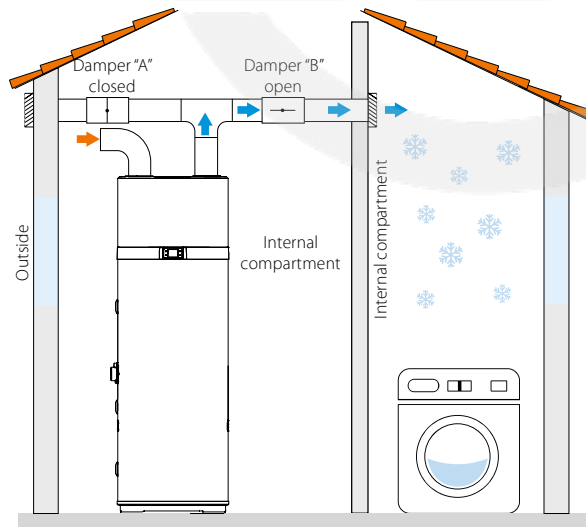


Fig. 3 - Example of installation in summer


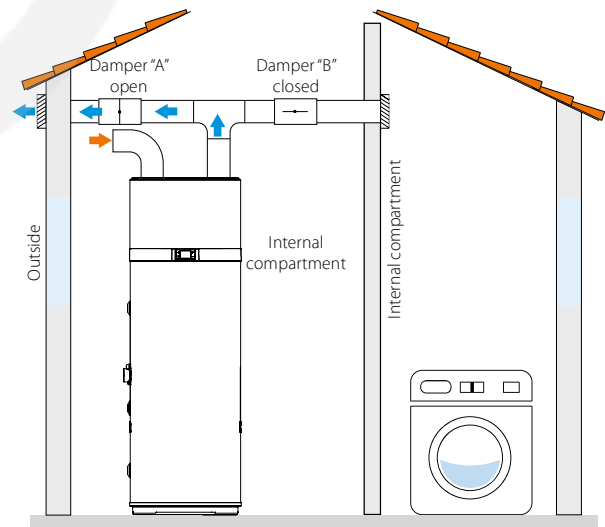


Fig. 4 - Example of installation in winter

One of the unique features of heat-pump heating systems is the fact that these units considerably reduce the temperature of the air, which is usually ejected outdoors. As well as being colder than the air in the room, the ejected air is also completely dehumidified, which is why the airflow can be conveyed back into the home to cool specific areas or rooms in summer. Installation involves doubling the exhaust pipe, on which two dampers ("A" and "B") are applied to convey the airflow either outside (fig. 3) or inside the house (fig. 4).

Daikin Altherma M HW Second Generation

- Available in floor standing (200-260 L)
- Compact modern design
- Anti-legionella cycle
- Scheduled operation
- Integrated solar thermal control (EKHHE-PCV37)
- Suitable for warm climate (EKHLE-CV3)

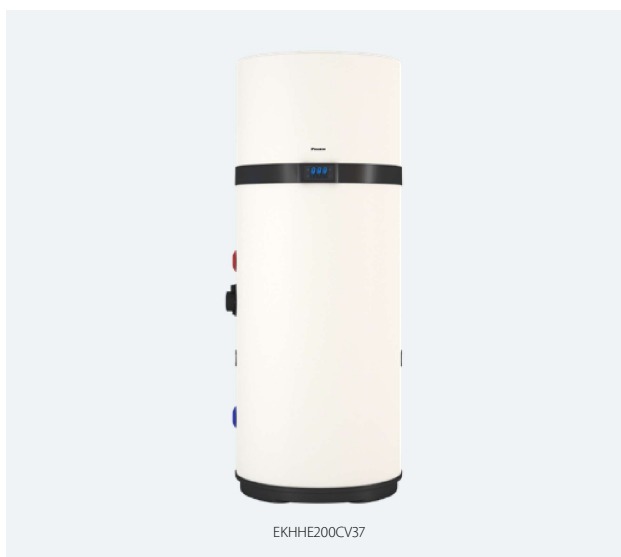

EKHHE200CV37




EKHHE-CV37



EKHHE-PCV37



EKHLE-CV3

Indoor unit				EK	HHE200CV37	HHE260CV37	HHE200PCV37	HHE260PCV37	HLE200CV3	HLE260CV3	
Heat up time	Max.			hh:mm	06:27	09:29	06:27	09:29	07:16	09:44	
COP					3.23	3.37	3.23	3.37	4.32	4.32	
Domestic hot water	Output	Nom		kW	1.34	1.25	1.34	1.25	1.60		
Equivalent hot water		Max		l	247	340	241	335	247	340	
Dimensions	Unit	Height		mm	1,607	1,892	1,607	1,892	1,607	1,892	
		Diameter		mm	Top: 621, Bottom: 628						
Weight	Unit	Empty		kg	85	97	96	106	86	98	
Installation place					Indoor						
IP class					IP24						
Refrigerant	Type				R-134a						
	GWP				1,430						
	Charge			TCO2Eq	1.43						
Heat pump	Charge			kg	1						
	Casing	Colour			White						
	Defrost method				Hot gas						
	Automatic defrost start		°C		-5				-	-	
	System pressure		Max.	bar	7						
	Operation range		Ambient	Min.	°CDB	-7				4	
			Max.	°CDB							
	Power supply		Phase		43						
			Frequency	Hz	1						
			Voltage	V	50						
		Maximum running current	A	8.5				8.2			
Tank	Integrated heating element power	Nom.		kW	1.5						
	Casing	Material			Enamelled steel						
	Installation	Solar thermal connection possible			-	-	Yes	Yes	-	-	
	Standing heat loss			W	63	71	63	71	63	70	
	Power supply		Phase		1						
			Frequency	Hz	50						
			Voltage	V	230						
Domestic hot water heating	General	Declared load profile			L	XL	L	XL	L	XL	
		Water heating energy efficiency class									
		Thermostat temperature setting		°C	55						
	Average climate	AEC (Annual electricity consumption)		kWh	761	1,210	761	1,210	883	1,315	
		ηwh (water heating efficiency)		%	135	138	135	138	116	127	
	Cold climate	AEC (Annual electricity consumption)		kWh	944	1,496	944	1,496	883	1,315	
	Warm climate	AEC (Annual electricity consumption)		kWh	631	1,046	631	1,046	883	1,315	
	Sound power level	Domestic hot water heating		dBA	53	51	53	51	52		

This product contains fluorinated greenhouse gases.

